

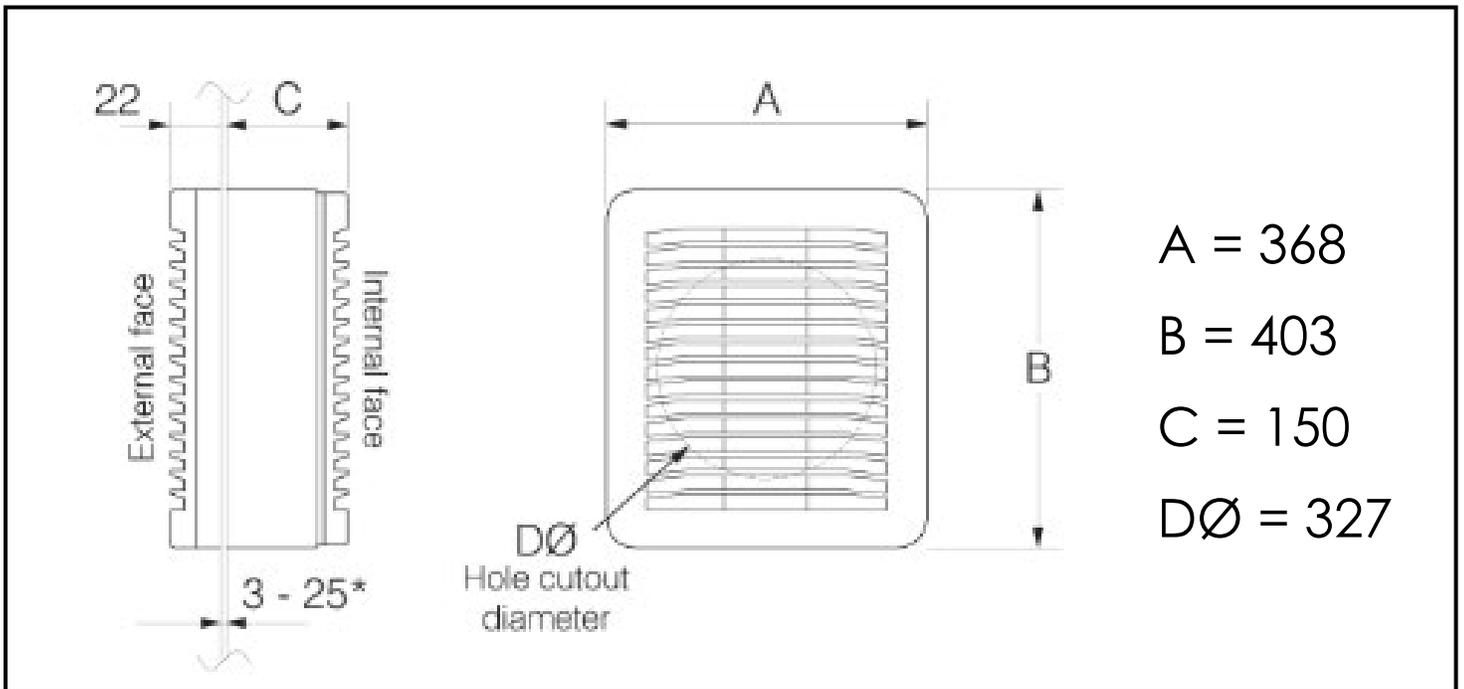


Technical Data Sheet

STYLVENT Wall / Window Fan

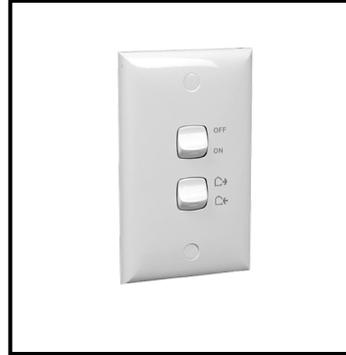

Stylvent Window or Wall 300 Exhaust Fan - HV-300AE

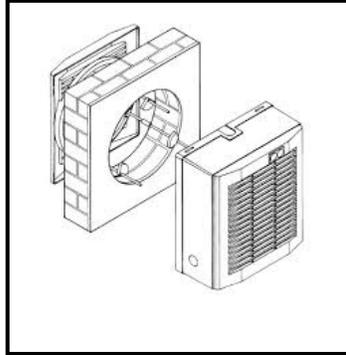

The Stylvent Series can be **wall or window mounted**, making it suitable for a wide range of **residential and commercial ventilation applications** — from conference rooms, living areas, and restaurants to swimming pools and shower rooms.

Models are available for **exhaust or supply air**, offering quiet, efficient, and reliable operation.

All units feature **weather and impact-resistant housings** with **integral shutters** for durability and long service life.

Features

Weather and impact resistant housing.

Rated "Continuous Run".

Exhaust mode is standard. Can be direct wired in supply air mode or dual mode with reversing switch.
(HV-230AE & HV-300AE only).

Easy to clean removable cover.

Wall rods and wall tubes for wall mounting available.

Details

Model No.	m ³ /h†	L/sec†	Fan Speed rpm	Avg. dB(A) @ 3m	Watts	Volts	IP Rating
HV-300AE	1100	306	1150	46	68	220-240	IPX4

† Air flow in exhaust mode


Accessories




Reversing Switch



Wall Rods

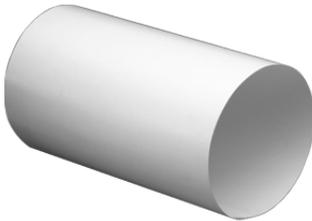

Wall Tubes

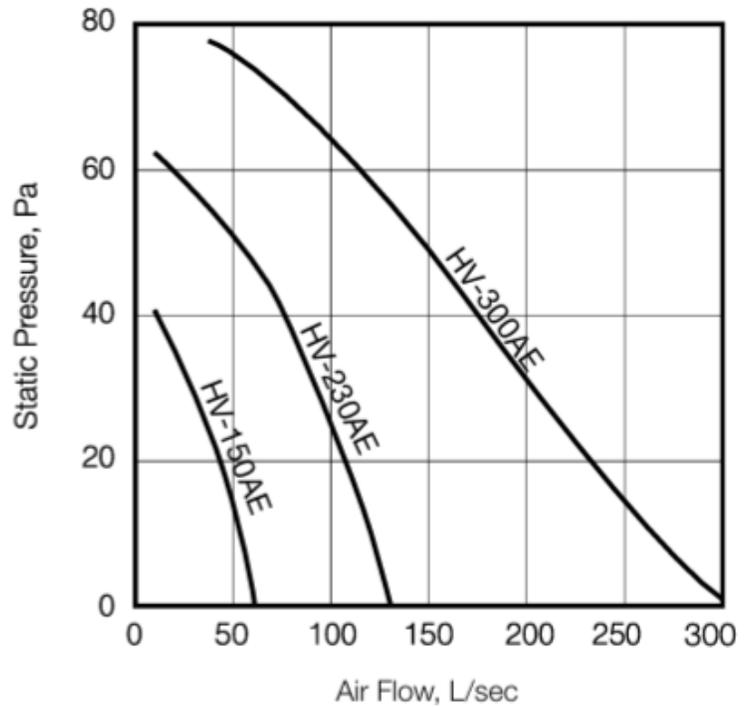

NOTES

