

Express Range



Tool free locking device for fast suspension of a variety of services, designed with a keyless release mechanism.


FEATURES / BENEFITS

- The XP1 is ideal for signage, shopfitting, lighting and other lightweight fixtures
- The XP2 is ideal for mechanical and electrical applications
- Up to six times faster to install than traditional methods
- Keyless; no tool required for adjustment
- Ergonomic buttons allow rapid adjustment
- Discreet and aesthetic design
- Supplied as a ready-to-use kit




INSTALLATION & ADJUSTMENT


1.



2.

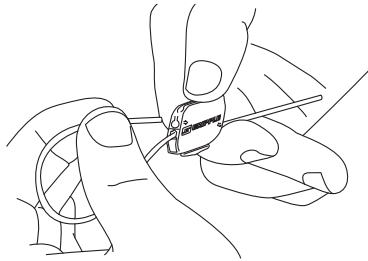


Adjust 1.

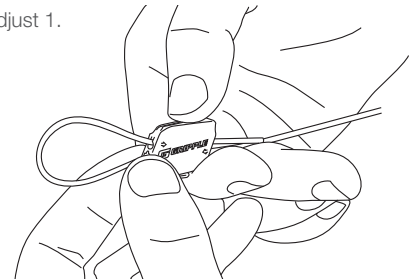


Ensure a minimum 75 mm of tail wire exit the hanger.

SPECIFICATION

XP1



XP2

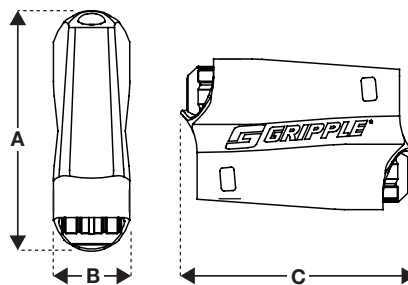

Dimension	No.1 (mm)	No.2 (mm)
A	18.5	21.4
B	5.9	11.6
C	23.5	28.4

AVAILABLE END FIXINGS



For more options on available end fixings please contact us or visit www.gripple.com

SUBMITTAL INFORMATION

Safe Working Load:

No.1 - 0 - 15 kg @ 5:1 safety factor
No.2 - 0 - 45 kg @ 5:1 safety factor

Material:

Housing - Type ZA2 Zinc

Wedge - Sintered steel hardened to min. 56 Rockwell C

Spring - Stainless Steel (Type 302)

End Cap - Polypropylene (MOPLN EP448T)

No. 1 Button - Acetal

No. 2 Button - 30% Glass filled Polypropylene

www.grippleaustralia.com.au

info@gripple.net.au



Polyplas International Pty Ltd
3 Corporate Avenue,
Rowville, 3178, VIC, Australia
Tel (AU): 03 9754 0333
Tel (NZ): 0800 933933